



BASSKEEPER ANGLE®

TUNED LF ABSORPTION PANEL



Image of 120x40cm model Ref.:BKA120 (on the left) and Ref.:BKA120 applied (ambient image).


DESCRIPTION

The BASSKEEPER ANGLE® is a low-frequency absorption panel with an open resonance box. The attractive finish allows you to create your own luxurious design of your room. BASSKEEPER ANGLE® produces an overpowering effect in the corners of the room where the bass builds-up and is most often present. It can be assembled combined with its congener BASSKEEPER WALL®.

The BASSKEEPER ANGLE® and the BASSKEEPER WALL® have the same external appearance and are both bass traps. The BASSKEEPER ANGLE® is tuned to 63Hz and applied to corners, while the BASSKEEPER WALL® is tuned to 125Hz and is applied to walls or ceilings. This combination is a first-rate approach to tame low-frequency anomalies in your room.

In most cases, the combination of these two models solves all problems caused by the accumulation of low frequencies in the room, thus providing acoustic control of low frequencies.

TECHNICAL DRAWINGS

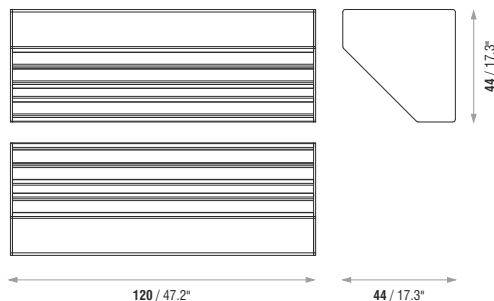


FEATURES

- Tuned at 63Hz.
- LF Average absorption: **0.70/m²** [$>50\text{Hz}; <250\text{Hz}$].
- Raw material: HD EPS with Coloured Projectable Cellulose Finishing.
- Fire-resistance: Projectable Cellulose - Euroclass A2-s1,d0 (similar to old M0); EPS - Euroclass B-s3,d1 (similar to old M1).
- Application on 90° corners.
- Very easy to install.
- Other colours available upon consultation.

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
BKA120	120 cm (47.2 in)	44 cm (17.3 in)	44 cm (17.3 in)	3.8 Kg (8.38 lbs)


ABSORPTION COEFFICIENT

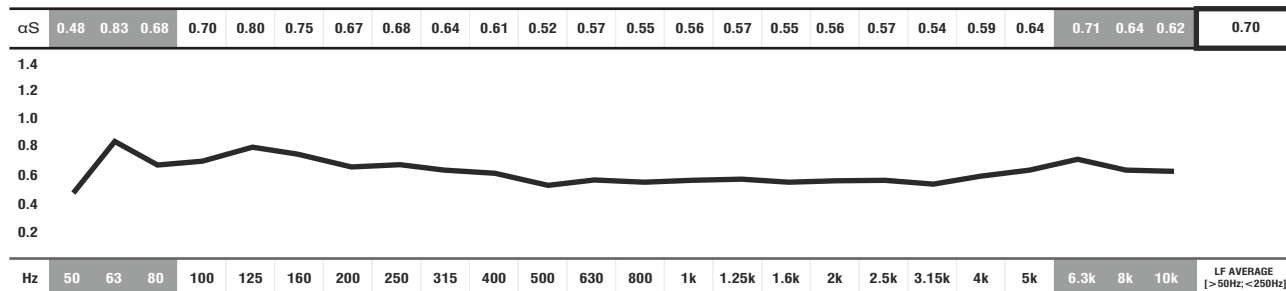

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $> 5\text{K}$] are Non Standard Values.

STANDARD PROJECTABLE CELLULOSE FINISHING COLOURS

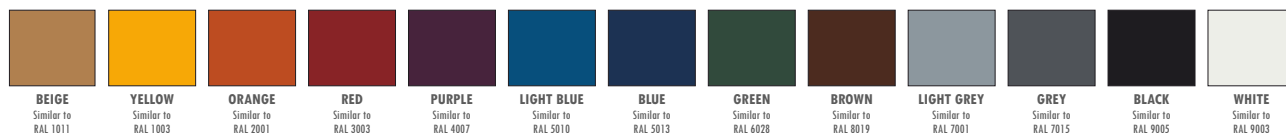

IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Sizes may vary slightly (+/-3mm) due to their production method and some inherent raw-materials characteristics.

