



# DECOART®

ABSORBENT PANEL



Image of a pair of the 96x30cm model Ref.:DAT096 (on the left) and Ref.:DAT096 applied (ambient image).

## DESCRIPTION

The DECOART® is an acoustic treatment absorber made of self-extinguishing acoustic foam. It has an angular arc-shaped geometry describing two elevations "up and down" that make it very attractive when combined with numerous modules.


When observed from a perpendicular perspective, it has a beautiful and harmonised appearance, which is particularly attractive for common areas in public spaces.

The creation of surfaces that are efficient at absorbing sound waves becomes imperative, and that is the main feature that makes this product so relevant.

The DECOART® is perfect to cover continuous areas of walls or ceilings as a coating material and can be used as a soundproofing reinforcement as well.

It is ideal for commercial areas, television studios, pavilions, auditoriums, meeting rooms, public spaces, etc., that need specific care regarding airborne noise control. It can be easily cut with a knife to be adjusted to the dimensions of walls and ceilings.

## TECHNICAL DRAWINGS

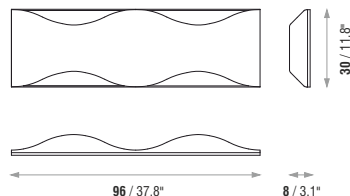

## FEATURES


- Raw material: Melamine Foam or Regular Acoustic Foam.
- NRC: **0.84/m²** [ $>250\text{Hz}$ ;  $<10\text{KHz}$ ].
- **MELAMINE FOAM** - Flame resistance: Euroclass B-s1,d0 (similar to old M1 France, Germany B1,GB class1, USA V0/HF1).
- **ACOUSTIC FOAM** - Flame resistance: Euroclass B-s3,d1 (similar to old M1).
- Velvety Finishing available.
- Shape and design recommended for continuous surface treatment.
- 100% recyclable.
- Sold in pairs

## MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
*DAT096	96 cm (37.8 in)	30 cm (11.8 in)	8 cm (3.1 in)	*0.9 Kg (1.98 lbs)

\*SOLD IN PAIRS - (weight of pair)

## ABSORPTION COEFFICIENT

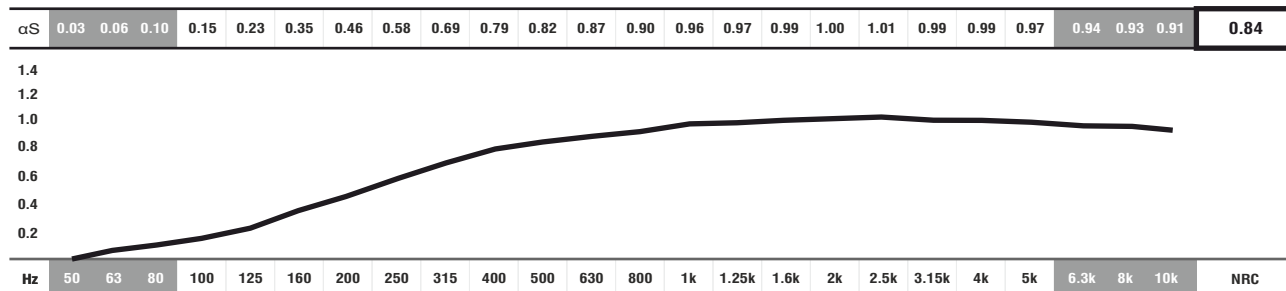


■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [ $<100\text{Hz}$  and  $>5\text{K}$ ] are Non Standard Values.

\*PANEL DATA ONLY OF REF.: DAT096 REGULAR FOAM.

## REGULAR AND MELAMINE FOAM COLOURS

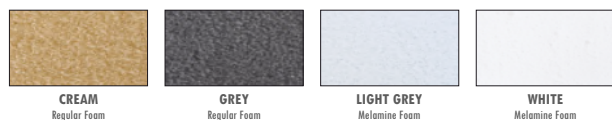

## VELVETY COLOURS



## IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.

